


AKCP Power Strip (PS+)

Simple power strips with custom options.

PS+ can be configured as a 1U or 0U to distribute power in your computer cabinet. A simple power strip, customizable with number and type of outlets (C13, C19, Localized), power options (1ph, 3ph, 16Amp, 32Amp, Breakers).


Combine a PS+ together with an SPC+.

Use an inline Smart Power Controller (SPC+) with your PS+ to build an intelligent power distribution system for your cabinet. SPC+ and PS+ can be connected into a single 0U mounted unit using our patent pending connection, or mounted separately with a flexible cable.

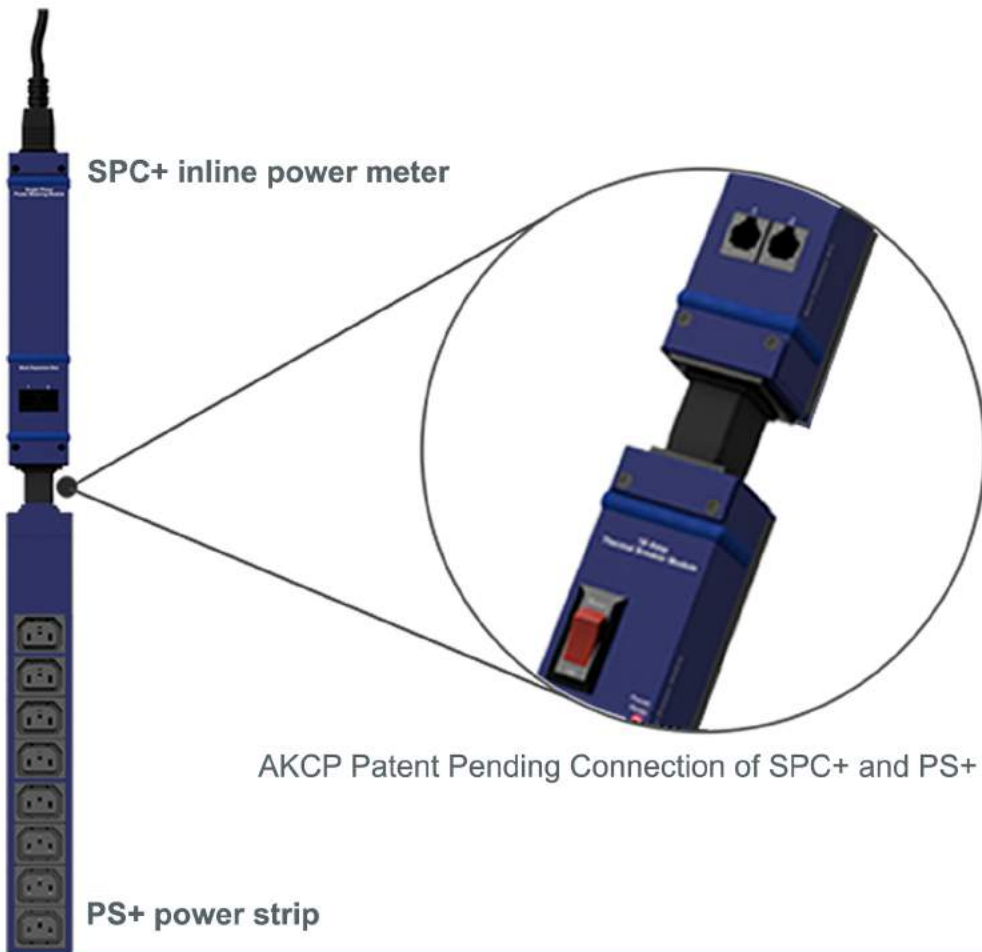

Custom Built Power Strip

Choose from a wide range of standard products, or build your own custom PS+ unit that meets your specific needs with no impact on price or leadtime.

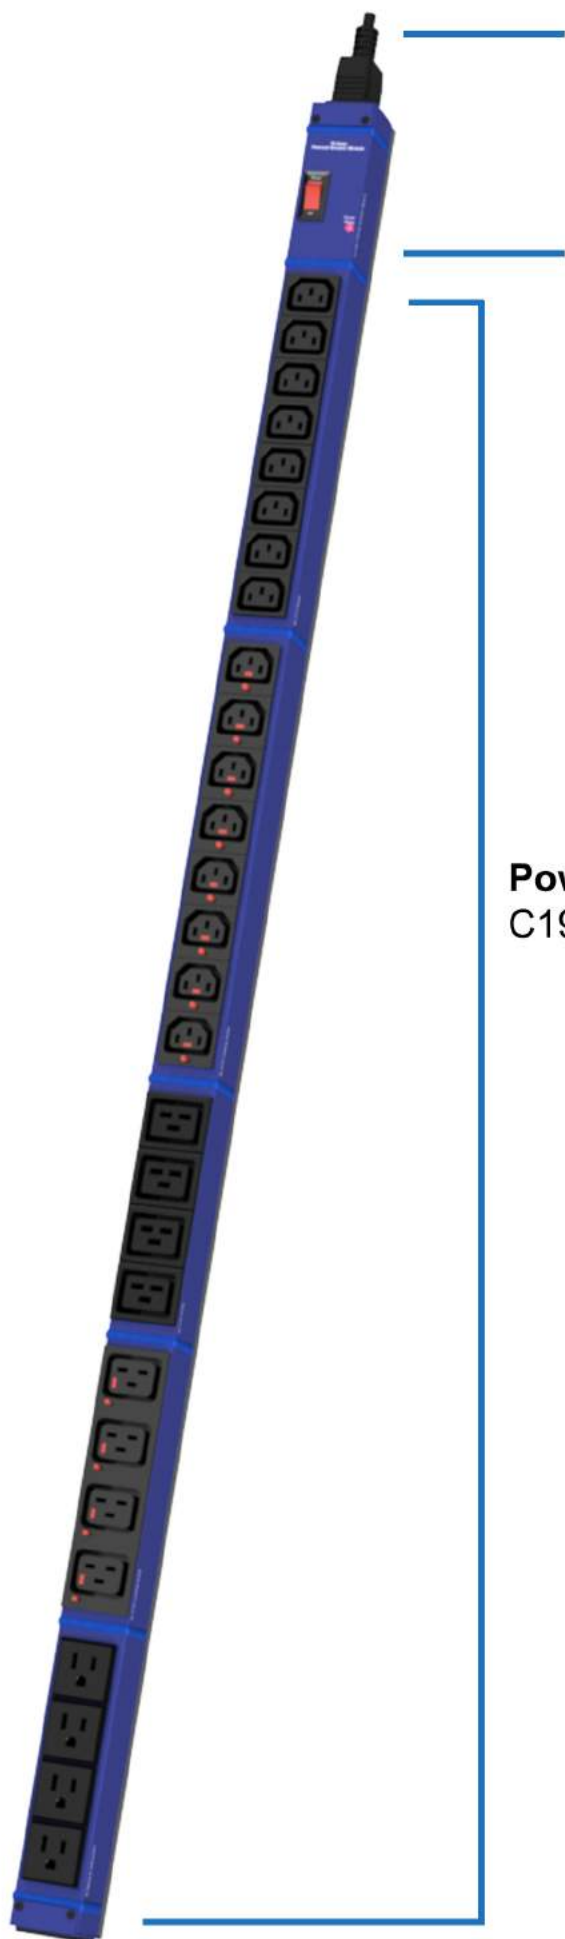

Power Cabling Options.

Fixed cables, localized plugs and C19 cables. Select the power cable that meets your installation requirements.

Circuit Breakers.

Protect your circuits with Hymag or Thermal type circuit breakers.

Power Outlet Options.

C19, C13, localized, locking and none locking type outlets.

Example PS+ with some of the options available

32Amp PS+

32 Amp PS+ units can be built as a single device, or split into two 16 Amp devices with a single 32 Amp power input. This gives the advantage of being able to mount each 16 Amp branch differently. For example, 1 device can be 0U mounted with the second 1U mounted, or they can be mounted side by side, so in cabinets with limited height where a traditional 32 Amp power strip will not fit the PS+ can.

32 Amp Single Unit

32 Amp Power In

Bank A
1x 16 Amp Breaker
16x C13 outlet

Bank B
1x 16 Amp Breaker
16x C13 outlet




32 Amp Split Unit

32 Amp Power In

Bank A
1x 16 Amp Breaker
16x C13 outlet



Bank B
1x 16 Amp Breaker
C19 endcap outlet

Bank B
C20 endcap inlet
16x C13 outlet

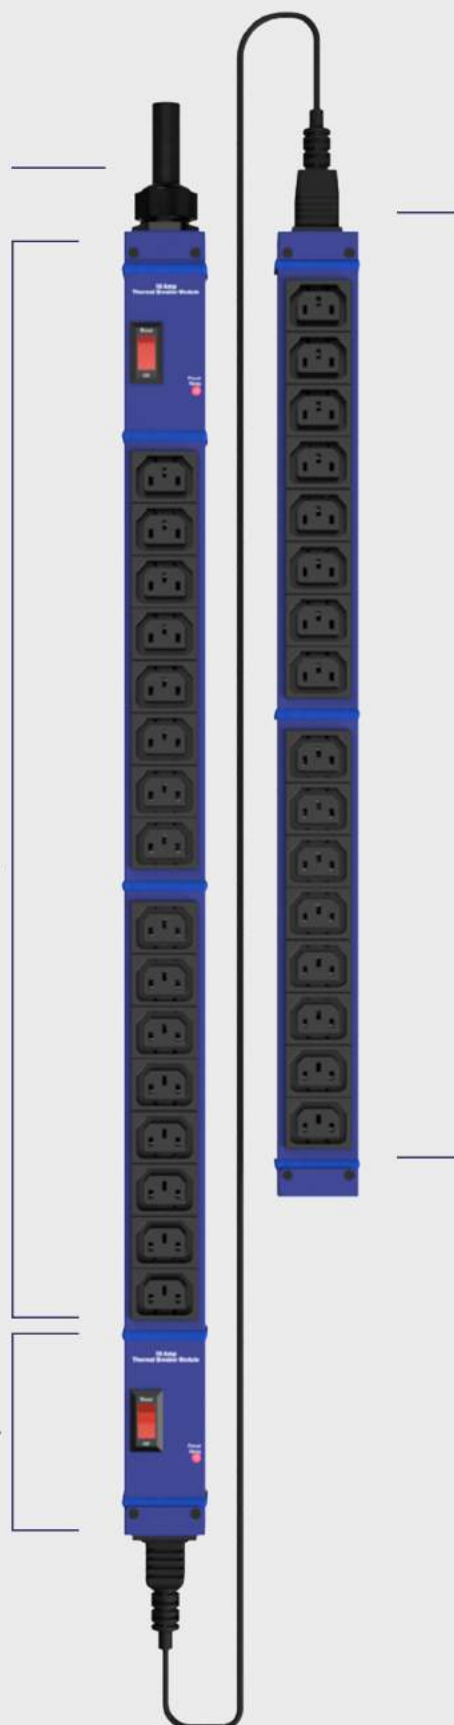

Technical Drawing


PS+ 16A with thermal breaker. 16xC13, 4xC19, 4xC19L, 4x NEMA5-15R*

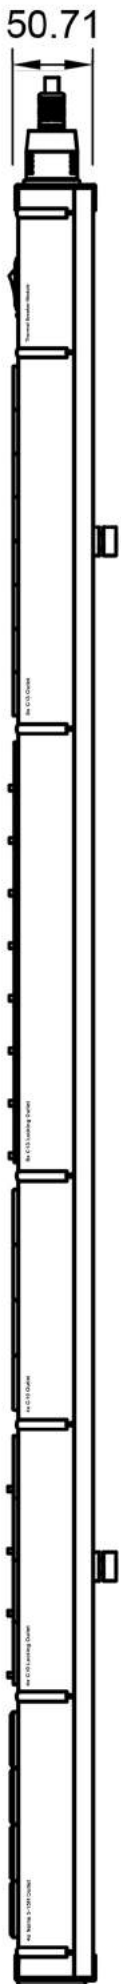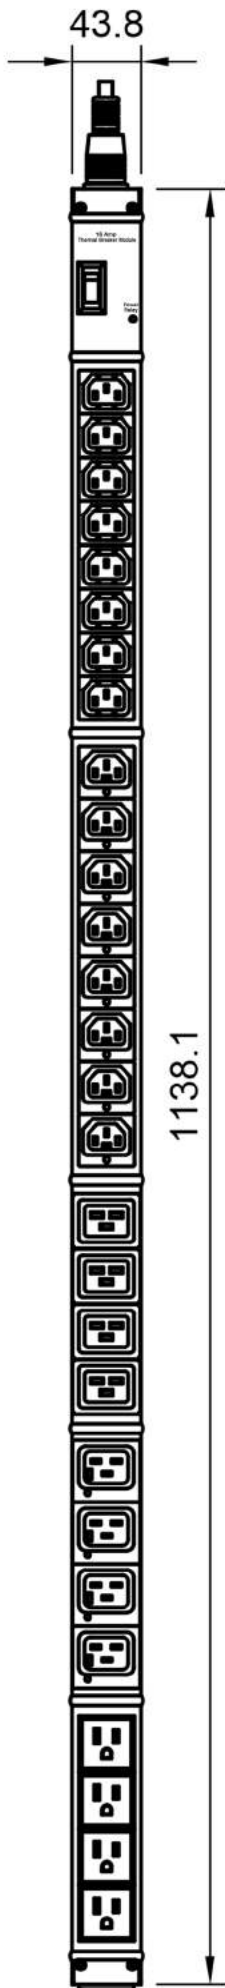

*Example configuration

Technical Drawing

PS+ 32A split with thermal breaker. 32xC13 (2 banks of 16xC13)*

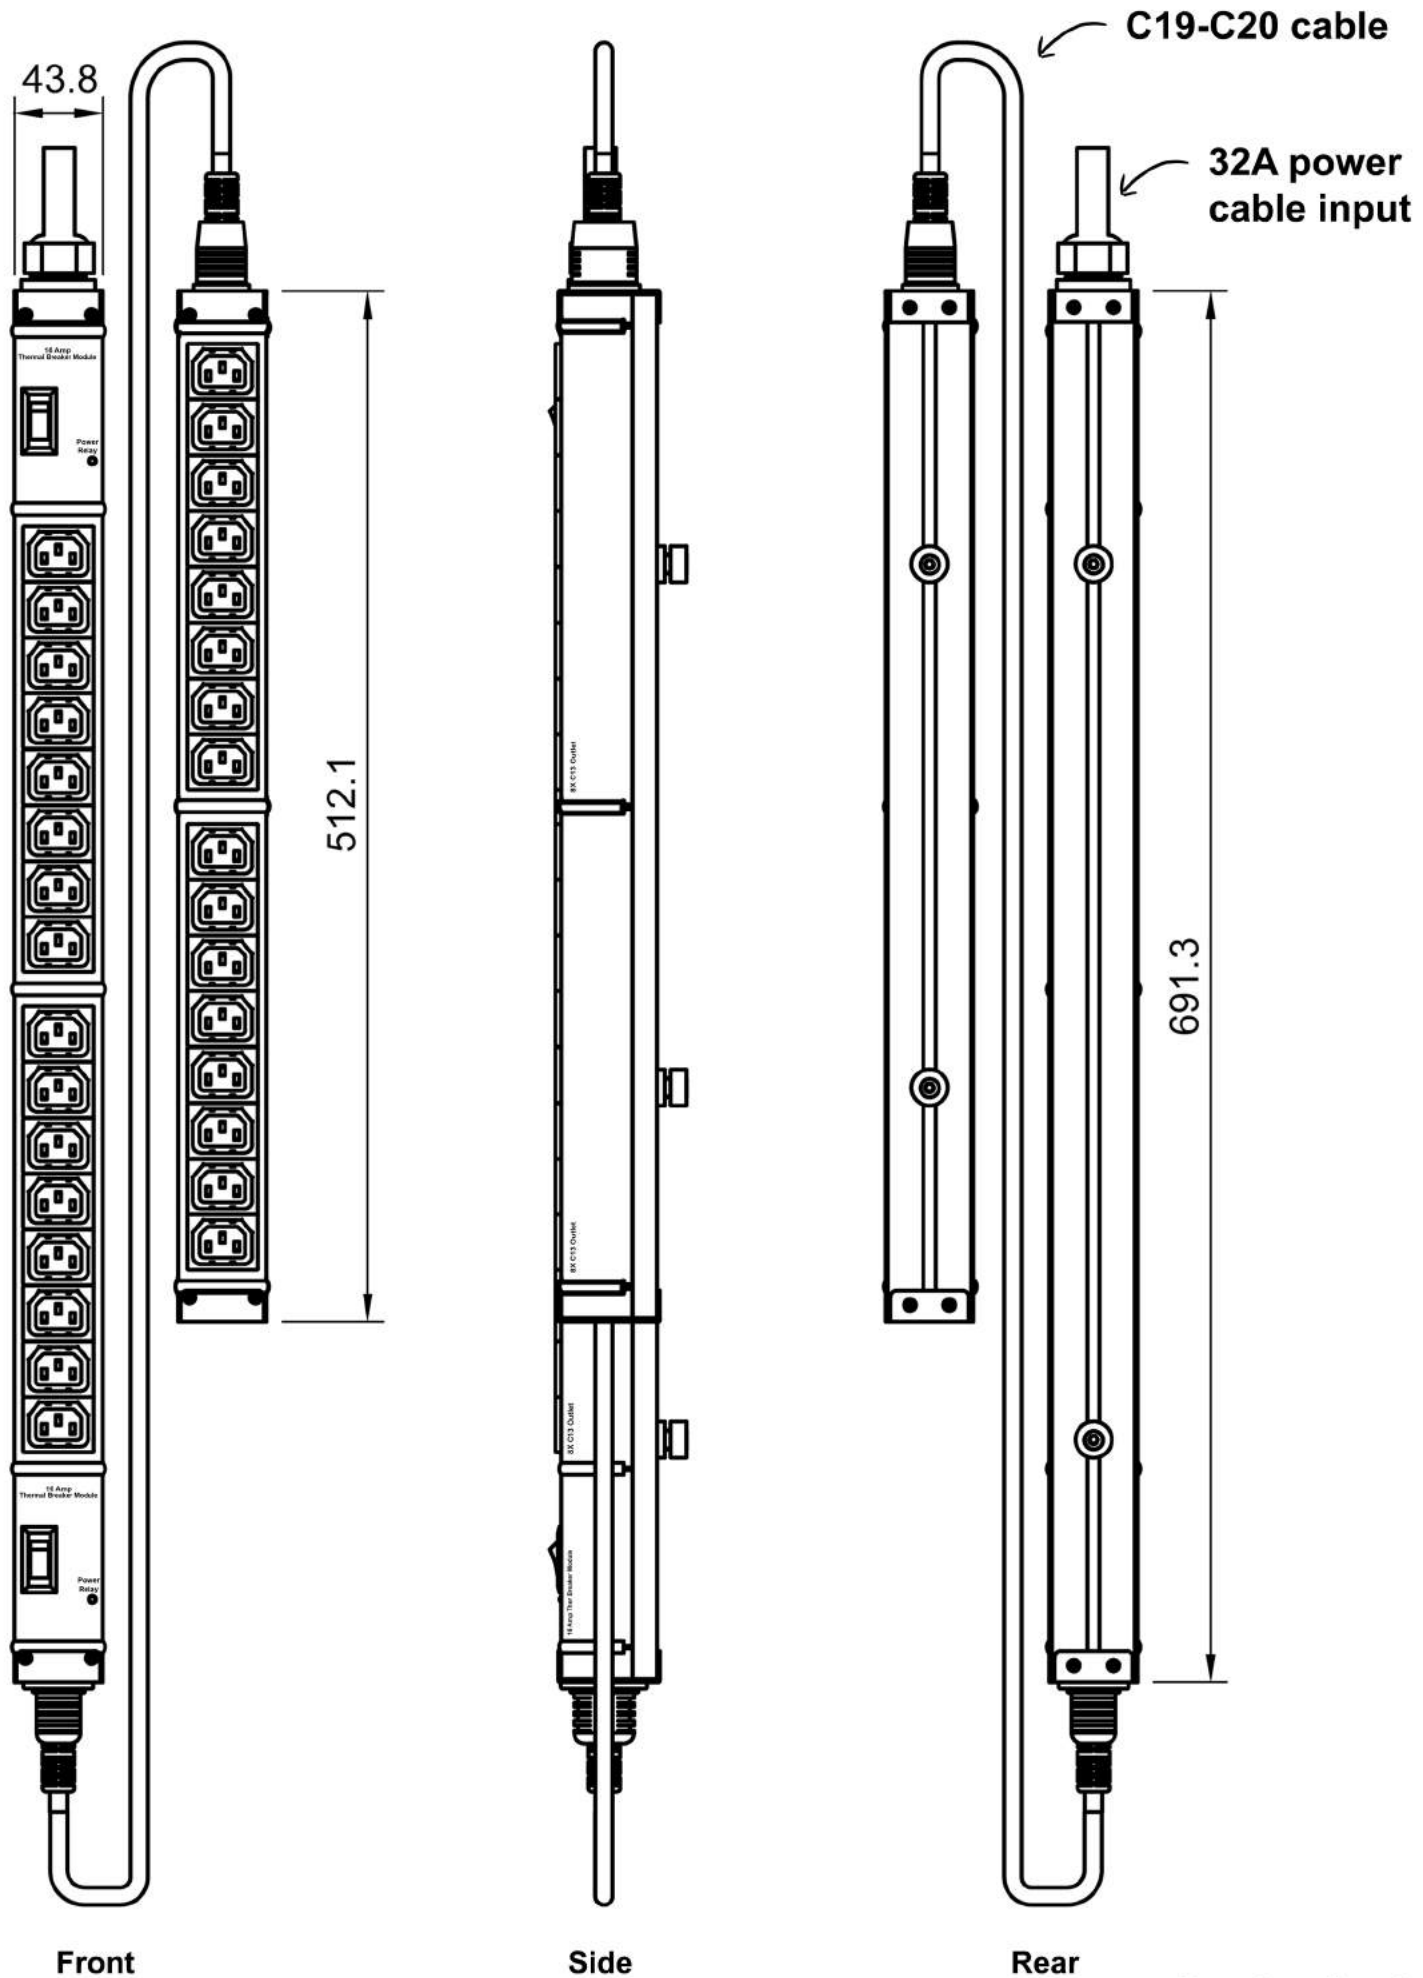

*Example configuration

PS+ Specification

Mounting	1U 17" rack mount or 0U Toolless mounting
Power In	100V~250V, up to 32Amps C20 inlet with C19 - local power cable (16 Amp only) or, Fixed 1.5m cable with choice of connector (32A)
Outlet Types	C13 (locking and non locking) C19 (locking and non locking) NEMA 5-15R NEMA 5-20R